

# Modular Master Clock (1U Version)



Brandywine's Modular Master Clock System represents the next generation of modular timing systems. Built on the highly successful High Performance Timing System, the Modular Master Clock System is a leap forward in design.

## Features:

- **Redundant design with multiple signal paths built in for high-availability.**
- **5 expansion slots (12 slots in 2U version).**
- **Industry-first GPS integrity checking**
- **Unique optical crosslink architecture for either Master-Slave hierarchical setups or Master-Master crosschecking and failover**
- **Operated by a detachable touch-screen interface, a first for any master clock system.**
- **Single or dual redundant configurations in a single 1U chassis**
- **Modules are hot-swappable from the front and minimize the need to disconnect cables.**

At the center of the MMC system are Brandywine's powerful Master Clock Modules (MCM). The MCM may be synchronized by a variety of reference sources and uses the selected reference to steer an embedded oscillator to provide stable and accurate time and frequency for the MMC. Multiple references can be prioritized with automatic failover. Uniquely, the MCM will also validate the GPS reference based upon the inherent stability of the MCM oscillator, providing hardening against possible GPS spoofing.



Available input reference selections include GPS (both C/A code and SAASM receivers are supported), IRIG-B, Have Quick/1PPS and external 10 MHz. In addition an MCM may be synchronized by up to 2 other MMC chassis using a fiber optic crosslink, this provides additional resiliency for the MMC time and frequency references.

The MMC supports multiple reference oscillator choices, including Rubidium (2U chassis only), Chip Scale Atomic Clock (CSAC) and Ovenized Oscillator (OCXO)

Up to two MCM modules may be installed in the 1U chassis, with automatic failover if the on-line module should fail

The output signals for the Modular Master Clock System are generated by up to 5 hot-swappable Output Signal Modules (OSM), and are ideal for custom solutions or future expansion. Available modules include NTP, low-phase-noise frequency, IEEE-1588 PTP, time code modules such as IRIG A, B, G, H, and NASA 36, BCD, PPS, PPM, Have Quick as well as optical crosslink.

The MMC status and control is via an Ethernet port using SNMP, or a Brandywine provided application. An optional full color touch screen that allows control of the local chassis, as well as remote chassis that are connected via crosslink may be connected to the front panel via an umbilical cable. User controls for the MMC are protected via password with encrypted storage. Network protocols also fully support privacy and authentication.

Revised: 10-11-2019

# Modular Master Clock (1U Version)



Typical 1U Chassis Rear View

## System Specifications

### Signal Reference Inputs

#### C/A code GPS Receiver (optional)

Receiver Type	GPS L1 C/A, SBAS L1 C/A
GPS Reception	14 channels (GPS, SBAS)
Sensitivity	Tracking: -159 dBm Acquisition: -147 dBm
Accuracy	15ns (1 $\sigma$ ) (@ -130 dBm)
TTFF	Hot Start: <5 sec (@ -130 dBm) Warm Start: 70 sec (@ -130 dBm) Cold Start: 70 sec (@ -130 dBm)

#### IRNSS Receiver (optional)

Receiver Type	GNSS Multi-constellation (GPS, GLONASS, NavIC (L5+S band))
Sensitivity	Tracking: -153 dBm Acquisition: -145 dBm
Accuracy	15ns (1 $\sigma$ )

#### SAASM GPS Receiver (optional)

Receiver Type	GB-GRAM Type II
Keyfill cable	DAGR compatible DB15

#### External 1PPS Input

Signal Format	Per ICD-GPS-060B
Rate	1 pulse per second
Impedance	50 ohm

#### External GPS Have Quick T/C Input

Signal Format	Per ICD-GPS-060A, STANAG 4246 HQ2A
Rate	1 frame per second
Impedance	1k ohm
Connector Type	DB15M

#### External IRIG B Input

Signal Format	IRIG B Per IRIG 200-04
Control Functions	Per IEEE1344
Modulation ratio	2.5:1 to 3.3:1
Amplitude	1 Vp-p to 5Vp-p
Impedance	>600 ohm
Connector Type	SMA

### Environmental

#### Power

2 power supply slots are available. Can be either AC input, DC input or a combination.

AC Supply		
Voltage		90-265 VAC 50/60 Hz.
Connector		100W Maximum IEC 320 C14 (standard) MS3102A-10SL-3P

DC Supply		
Voltage		21-32VDC
Connector		Barrier Terminal Block

#### Physical

Length (depth)	20.00"
Width	17.00" Chassis 19.00" Front Panel
Height	1.72 1U chassis
Weight	25 lbs nominal (slides not included)

#### Temperature

Air Temperature	-15 to 55degC
Altitude Conditions	-1500 ft to +11,000 ft
Airflow	30 cfm front to rear.

#### Shock and Vibration


Operating Shock	MIL-STD 810F 20g/11ms
Bench Handling Shock	MIL-STD 810F
Vibration	MIL-STD-167-1
Structure-borne Noise	MIL-STD-740-2

#### EMC

FCC Part 15, Class A
IEC CISPR 22
CE

# Modular Master Clock (1U Version)

## Master Clock Module (MCM)

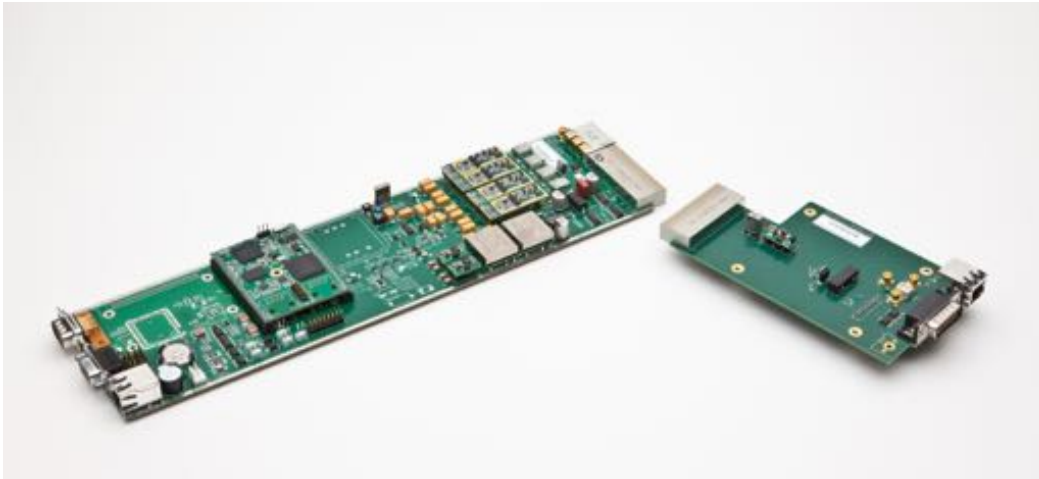

The Master Clock Module is the clock at the heart of the MMC. The MMC may use either one (standard) or two (optional) hot-swappable Master Clock Modules for redundancy and high-availability operation. The MCM may be configured with one of three types of disciplined oscillator, depending upon price/performance desired. The MCM is accessed either via the (optional) detachable touch screen display, an external Ethernet port, or a front panel maintenance Ethernet port. All aspects of the MMC operation are available through the optional display. For MMC configurations where multiple chassis are connected via an optical fiber link, the status and configuration of a remote chassis can be accessed across this link. The MCM provides a number of signal outputs without the need to install any Output Signal Modules.

Each MCM includes provision for Information Assurance. The touch display is password protected, and the password is stored in encrypted form. Password requirements and updates are implemented by means of warning screens. All Network connections use both authentication and privacy corresponding to the protocol in use. Only required ports and protocols are enabled.

### Oscillator Options

		CSAC	OCXO
Time Accuracy	Locked Holdover 10 days	<5ns 2 $\sigma$ 1ms	<10ns 2 $\sigma$ <10ms
Frequency Accuracy	Locked <sup>1</sup> Holdover	<2 x 10 <sup>-12</sup> <9 x 10 <sup>-10</sup> /mo	<5 x 10 <sup>-11</sup> <1.5 x 10 <sup>-9</sup> /mo
Temperature	-0 to 50°C	<5 x 10 <sup>-10</sup>	<2 x 10 <sup>-9</sup>
Reference Error		<5 x 10 <sup>-10</sup>	<1 x 10 <sup>-8</sup>
Detection Sensitivity			

### MCM Inputs

Available Reference selection  
 GPS/IRNSS/SAASM (optional)  
 IRIG B  
 IRIG B + 1PPS  
 Have Quick +1PPS  
 1PPS  
 10MHz  
 Crosslink A  
 Crosslink B

### MCM Outputs<sup>1</sup>

Time and Frequency Outputs  
 1PPS  
 10 MHz<sup>2</sup>  
 Propagation delay compensation  
 Input  $\pm 1$ ns -100ms in 1ns steps all inputs  
 Outputs  $\pm 0 - 1$ ms in 5ns steps  
 Status and Control  
 100BaseT Ethernet  
 SNMP v3 RFC 3411, 3418  
 NTP v4 RFC 5905  
 IP v4, IP v6  
 Touch panel display  
 4.1 inch WVGA (800 X 480) LED 350 NIT  
 Digital Landscape TFT LCD w/ Touch Screen  
 Alarm Relay  
 Dry Contact Closure 100mA  
 Audible Buzzer Alarm

<sup>1</sup> Averaged over 24 hours

<sup>2</sup> Not available if GPS/IRNSS/SAASM option is fitted


# Modular Master Clock (1U Version)

## Universal Output Signal Module

The Universal OSM provides the ultimate in flexibility. The Universal OSM has 4 outputs, each of which is user-programmable to a wide variety of time code or pulse outputs. This flexibility ensures that an MMC can be reconfigured as requirements change, and fewer modules are needed in comparison to designs where modules are single function. Time code outputs can be configured independently for local time. Passive rear transition modules are available for single ended BNC, or differential connectors. Each output is individually adjustable for propagation delay, ensuring that for high accuracy synchronization different cable lengths can be accommodated.

Available output formats:

- 1 PPS and 1PPM
- HaveQuick
- IRIG A, B, E, G, H
- XR3
- 2137

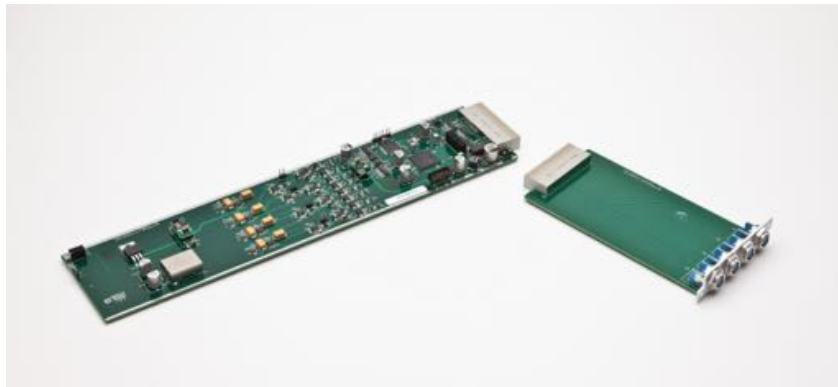

### Specifications:

#### **Pulse-per-second/minute**

Signal Format	Per ICD-GPS-060B
1PPS Rate	1 pulse per second
1PPM Rate	1 pulse per minute
Rising Edge	On Time
Rise Time	<20ns
Fall time	<100ns
Pulse Width	20 $\mu$ s $\pm$ 5% default.
Amplitude	10V $\pm$ 10% into 50 $\Omega$
Output condition	when TFOM<7 only

#### **Have Quick Time of Day Output**

Signal Format	Per ICD-GPS-060A
Rising Edge	On Time
Rise Time	<100ns
Fall time	<100ns
1PPS coherence	< 100ns of rising edge
Amplitude	5V $\pm$ 5%
Output condition	when TFOM<7 only

#### **BCD Time Code Output**

Signal Format	Per ICD-GPS-060A
Rate	50 bits/sec
1PPS coherence	< 100ns of rising edge
Mark (logical 1)	+2.5V $\pm$ 1V
Space (logical 0)	-2.5V $\pm$ 1V
Output condition	when TFOM<7 only
Connector Type	3 Pin

#### **IRIG B Time code Output**

Signal Format	B002, B122, B124 (consult factory for other formats)
Control Functions	B124 per IEEE1344
Rate	1kHz modulated
Modulation ratio	10:3 $\pm$ 10%
Amplitude	5V <sub>p-p</sub> $\pm$ 20%
Output condition	when TFOM<7 only

#### **2137 Time code Output**

Signal Format	2137
Carrier	1kHz modulated
Modulation ratio	10:3 $\pm$ 10%
Amplitude	5V <sub>p-p</sub> $\pm$ 20%
Output condition	when TFOM<7 only


#### **XR3 Time code Output**

Signal Format	XR3
Rising Edge	On Time
Rise Time	<100ns
1PPS coherence	< 100ns of rising edge
Amplitude	5V $\pm$ 5%
Output condition	when TFOM<7 only

# Modular Master Clock (1U Version)

## Low Phase Noise Analog

The Analog Low Phase Noise Module provides 4 low phase noise reference frequency outputs at 1, 5, or 10MHz.

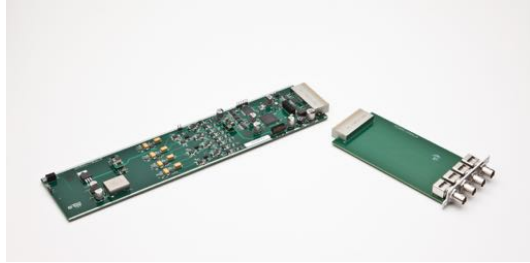


### Specifications:

Waveform	Sinusoid
Amplitude	13dBm/1V <sub>rms</sub>
Harmonic Distortion	-60dBc
Non Harmonic	<-80dBc 10k - 500MHz
Connector Type	Coaxial, BNC
Accuracy	Locked to MCM oscillator
MCM Switching	Hitless switch

Phase Noise dBc/√Hz	10MHz	5MHz	1MHz
1Hz	-90dBc	-95dBc	-98dBc
10Hz	-120dBc	-130dBc	-120dBc
100Hz	-142dBc	-142dBc	-125dBc
1KHz	-155dBc	-155dBc	-125dBc
10kHz	-158dBc	-158dBc	-130dBc

## Synthesizer Module

The Synthesizer Module provides 4 programmable output frequencies on the range 250Hz to 33MHz. The frequency scheme ensures that telecom frequencies on multiples of 8kHz are exact.

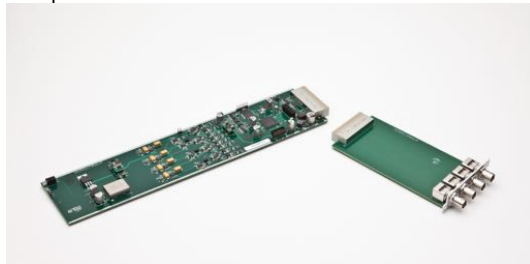


### Specifications:

Waveforms		
Sinusoid	1ea.	10dBm nominal
Connector		BNC
Square	1ea.	0-5Vpk
Connector		BNC
Differential	2ea	per RS-422
Connector		3 Pin circular
Settable Resolution		1Hz
Frequency range		250 Hz to 33MHz
Accuracy		Locked to MCM oscillator
MCM Switching		Hitless switch

## NTP Server

The NTP Server module enables the Modular Master Clock to act as an NTP server over an Ethernet network. Designed with security in mind, the NTP server module uses a custom network stack that enables it to ONLY act as an NTP server, and prevent it from being used as a gateway to compromise the entire system.

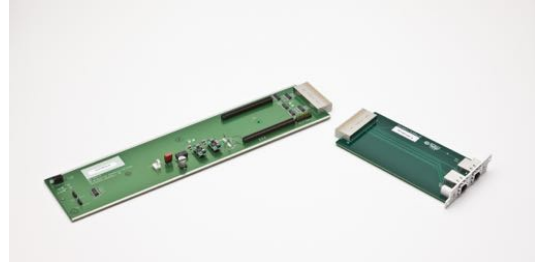


### Specifications:

Signal Format	Ethernet 100BaseT
Protocols supported	NTPv3 RFC1305
	NTPv4 RFC 5905
Authentication	MD5, SHA-1
Connector Type	RJ45
No of Outputs	2

## Optical Crosslink Module

The Optical Crosslink Module is a unique feature of the MMC. When installed, it allows a second MMC to be synchronized as a slave chassis. If both chassis have a primary reference installed (e.g. GPS) then the two MCM's operate as peers. Peering provides additional redundancy, as well as providing additional references to detect failures.

When a duplex cable is provided, the optical link provides seamless and automatic propagation delay compensation. A security mode allows the optical link to be operated in a single direction from Master to Slave over a single fiber.

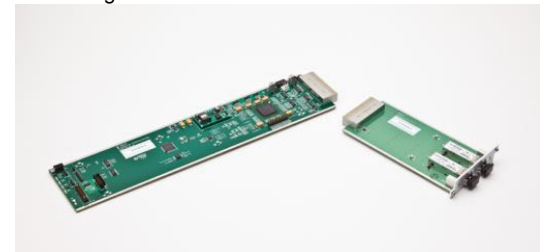

### Specifications:

Connector Type	LC
No of Outputs	2 bi-directional per OSM
<b>Synchronization Accuracy</b>	
Phase Measure Accuracy	1ns
End to End Accuracy	<5ns synchronization
<b>Optical</b>	
Wavelength	Single Mode 1300nm
Safety	Class 1 CDRH/IEC 825
Range <sup>3</sup>	2000m 9/125um cable

<sup>3</sup> Consult Factory for longer range or multimode