

Modular Master Clock



Brandywine's Modular Master Clock System represents the next generation of modular timing systems. Built on the highly successful High Performance Timing System, the Modular Master Clock System is a leap forward in design.

Features:

- **Redundant design with multiple signal paths built in for high-availability.**
- **12 expansion slots in the 2U version and 5 expansion slots in the 1U variant.**
- **Industry-first GNSS integrity checking**
- **Unique optical crosslink architecture for either Master-Slave hierarchical setups or Master-Master crosschecking and failover**
- **2U version is operated by an intuitive touch-screen interface, a first for any master clock system.**
- **All components are hot-swappable and are dual redundant.**
- **The Output Signal modules are hot-swappable from the front and minimize the need to disconnect cables.**

At the center of the MMC system are Brandywine's powerful dual-redundant Master Clock Modules (MCM). Each MCM may be synchronized by a variety of reference sources and uses the selected reference to steer an embedded oscillator to provide stable and accurate time and frequency for the MMC. Multiple references can be prioritized with automatic failover. Uniquely, the MCM will also validate the GNSS reference based upon the inherent stability of the MCM oscillator, providing hardening against possible GNSS spoofing.

Available input reference selections include GNSS (both commercial GNSS and SAASM GPS receivers are supported), IRNSS (both L5 and S band implementations are supported), IRIG-B, Have Quick/1PPS and external 10 MHz. In addition an MCM may be synchronized to up to 2 other MMC chassis using a fiber optic crosslink, this provides additional resiliency for the MMC time and frequency references.

The MMC supports multiple reference oscillator choices, including Rubidium (2U chassis only), Chip Scale Atomic Clock (CSAC) and Ovenized Oscillator (OCXO)

The output signals for the Modular Master Clock System are generated by up to 12 hot-swappable Output Signal Modules (OSM), and are ideal for custom solutions or future expansion. Available modules include NTP, low-phase-noise frequency, IEEE-1588 PTP, time code modules such as IRIG A, B, G, H, and NASA 36, BCD, PPS, PPM, Have Quick as well as optical crosslink. The MMC status and control is via a full color touch screen that allows control of the local chassis, as well as remote chassis that are connected via crosslink. Other control options are via a Windows application, and via SNMPv3. User controls for the MMC are protected via password with encrypted storage. Network protocols also fully support privacy and authentication.



Modular Master Clock



Typical 2U Chassis Rear View

System Specifications

Signal Reference Inputs

GNSS Receiver (optional)

Receiver Type	GNSS Multi-constellation (GPS, GLONASS, Galileo ¹ , BeiDou)
Sensitivity	Tracking: -159 dBm Acquisition: -147 dBm
Accuracy	15ns (1σ) (@ -130 dBm)

IRNSS Receiver (optional)

Receiver Type	GNSS Multi-constellation (GPS, GLONASS, NavIC (L5+S band))
Sensitivity	Tracking: -153 dBm Acquisition: -145 dBm
Accuracy	15ns (1σ)

SAASM GPS Receiver (optional)

Receiver Type	GB-GRAM Type II
Keyfill cable	DAGR compatible DB15

External 1PPS Input

Signal Format	Per ICD-GPS-060B
Rate	1 pulse per second
Impedance	50 ohm

External GPS Have Quick T/C Input

Signal Format	Per ICD-GPS-060A, STANAG 4246 HQ2A
Rate	1 frame per second
Impedance	1k ohm
Connector Type	DB15M

External IRIG B Input

Signal Format	IRIG B Per IRIG 200-04
Control Functions	Per IEEE1344
Modulation ratio	2.5:1 to 3.3:1
Amplitude	1 Vp-p to 5Vp-p
Impedance	>600 ohm
Connector Type	DB15M

External 10MHz Reference Input

Frequency	10MHz +/- 5E-11
Amplitude	8-15dBm
Impedance	50 ohm
Connector Type	BNC

¹ Requires firmware upgrade

Environmental

Power

2 power supply slots are available on both 1U and 2U chassis. 2U chassis can be either AC input, DC input or a combination. 1U is single or dual AC supply only.

AC Supply

Voltage	90-265 VAC 50/60 Hz. 100W Maximum
Connector	IEC 320 C14 (standard) MS3102A-10SL-3P (optional MS shown)

DC Supply

Voltage	18-36VDC
Connector	Barrier Terminal Block

Physical

Length (depth)	20.00"
Width	17.00" Chassis Width – 19.00" (Front Panel Width)
Height	3.47" 2U chassis 1.72 1U chassis
Weight	25 lbs nominal (slides not included)

Temperature

Air Temperature	-15 to 55degC
Altitude Conditions	-1500 ft to +11,000 ft
Airflow	30 cfm front to side/rear. Side airflow is not obstructed by rack slides

Shock and Vibration


Operating Shock	MIL-STD 810F 20g/11ms
Bench Handling Shock	MIL-STD 810F
Vibration	MIL-STD-167-1
Structure-borne Noise	MIL-STD-740-2

EMC

FCC Part 15, Class A
IEC CISPR 22
CE

Modular Master Clock

Master Clock Module (MCM)

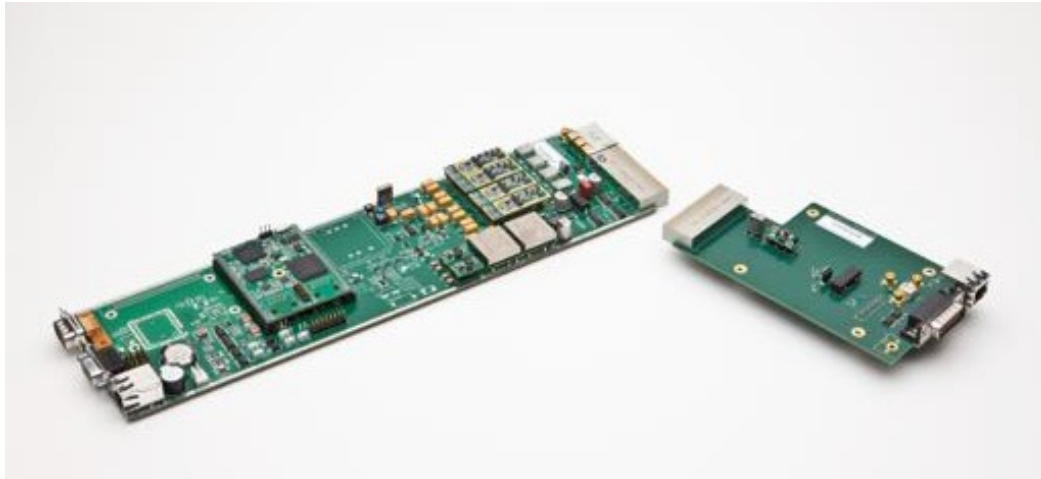

The Master Clock Module is the oscillator at the heart of the MMC. The MMC may use either one (standard) or two (optional) hot-swappable Master Clock Modules for redundancy and high-availability operation. The MCM may be configured with one of three types of oscillator, depending upon price/performance desired. The MCM is accessed either via the front touch screen display, an external Ethernet port, or a front panel maintenance Ethernet port. All aspects of the MMC operation are available through the front panel display. For MMC configurations where multiple chassis are connected via an optical fiber link, the status and configuration of a remote chassis can be accessed across this link.

MCM's installed in a 2U chassis provide a number of signal outputs without the need to install any Output Signal Modules.

Each MCM includes provision for Information Assurance. The front panel display is password protected, and the password is stored in encrypted form. Password requirements and updates are implemented by means of warning screens. All Network connections use both authentication and privacy corresponding to the protocol in use. Only required ports and protocols are enabled.

Oscillator Options

		Rubidium ¹	CSAC	OCXO
Time Accuracy	Locked Holdover 10 days	<5ns 2σ	<5ns 2σ	<10ns 2σ
Frequency Accuracy	Locked Holdover	<1E-12	<2E-12	<5E-12
		<2E-11/mo	<3E-13/mo	<3E-8/yr
Temperature	-0 to 50°C	<1E-10	<5E-10	<2E-9
Reference Error		<2E-10	<5E-10	<1E-8
Detection Sensitivity				

MCM Inputs

Available Reference selection
 GNSS/IRNSS/SAASM (optional)
 IRIG B
 IRIG B + 1PPS
 Have Quick +1PPS 1PPS
 10MHz
 Crosslink A
 Crosslink B

MCM Outputs¹

Time and Frequency Outputs
 1PPS (2ea)
 IRIG B + IEEE1344 CF
 Have Quick
 50 bit BCD
 5 MHz²
 10 MHz²

Propagation delay compensation
 Input ±1ns -100ms in 1ns steps all inputs
 Outputs ± 0 – 1ms in 5ns steps

Status and Control
 100BaseT Ethernet
 SNMP v3 RFC 3411, 3418
 NTP v4 RFC 5905
 IP v4, IP v6

Touch panel display
 4.1 inch WVGA (800 X 480) LED 350 NIT
 Digital Landscape TFT LCD w/ Touch Screen

Alarm Relay
 Dry Contact Closure 100mA
 Audible Buzzer Alarm

¹ 2U chassis only

² Not available if GNSS/IRNSS/SAASM option is fitted


Modular Master Clock

Universal Output Signal Module

The Universal OSM provides the ultimate in flexibility. The Universal OSM has 4 outputs, each of which is user-programmable to a wide variety of time code or pulse outputs. This flexibility ensures that an MMC can be reconfigured as requirements change, and fewer modules are needed in comparison to designs where modules are single function. Time code outputs can be configured independently for local time. Passive rear transition modules are available for single ended BNC, or differential connectors. Each output is individually adjustable for propagation delay, ensuring that for high accuracy synchronization different cable lengths can be accommodated.

Available output formats:

- 1 PPS and 1PPM
- HaveQuick
- IRIG A, B, E, G, H
- XR3
- 2137

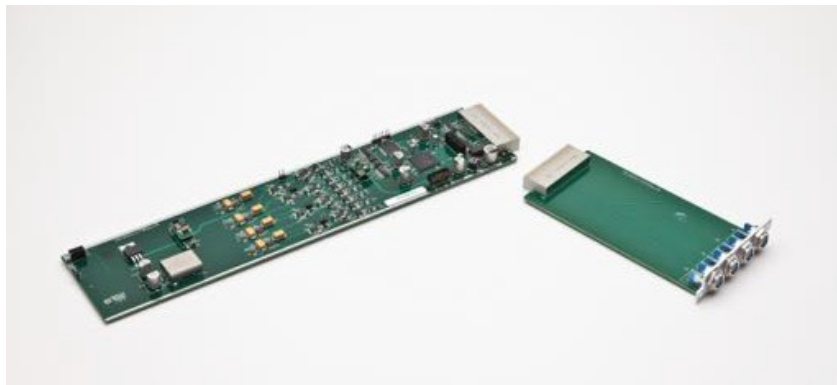

Specifications:

Pulse-per-second/minute

Signal Format	Per ICD-GPS-060B
1PPS Rate	1 pulse per second
1PPM Rate	1 pulse per minute
Rising Edge	On Time
Rise Time	<20ns
Fall time	<100ns
Pulse Width	20 μ s \pm 5% default.
Amplitude	10V \pm 10% into 50 Ω
Output condition	when TFOM<7 only

Have Quick Time of Day Output

Signal Format	Per ICD-GPS-060A
Rising Edge	On Time
Rise Time	<100ns
Fall time	<100ns
1PPS coherence	< 100ns of rising edge
Amplitude	5V \pm 5%
Output condition	when TFOM<7 only

BCD Time Code Output

Signal Format	Per ICD-GPS-060A
Rate	50 bits/sec
1PPS coherence	< 100ns of rising edge
Mark (logical 1)	+2.5V \pm 1V
Space (logical 0)	-2.5V \pm 1V
Output condition	when TFOM<7 only
Connector Type	3 Pin

IRIG B Time code Output

Signal Format	B122, B124 (consult factory for other formats)
Control Functions	B124 per IEEE1344
Rate	1kHz modulated
Modulation ratio	10:3 \pm 10%
Amplitude	5V _{p-p} \pm 20%
Output condition	when TFOM<7 only

2137 Time code Output


Signal Format	2137
Carrier	1kHz modulated
Modulation ratio	10:3 \pm 10%
Amplitude	5V _{p-p} \pm 20%
Output condition	when TFOM<7 only

XR3 Time code Output

Signal Format	XR3
Rising Edge	On Time
Rise Time	<100ns
1PPS coherence	< 100ns of rising edge
Amplitude	5V \pm 5%
Output condition	when TFOM<7 only

Low Phase Noise Analog

The Analog Low Phase Noise Module provides 4 low phase noise reference frequency outputs at 1, 5, or 10MHz.

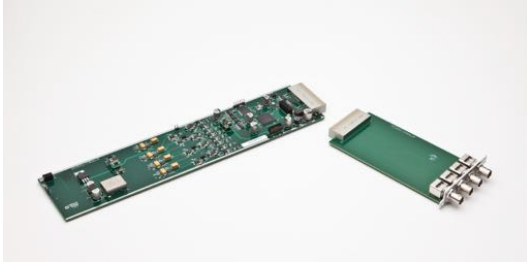


Specifications:

Waveform	Sinusoid
Amplitude	13dBm/1V _{rms}
Harmonic Distortion	-60dBc
Non Harmonic	<-80dBc 10k - 500MHz
Connector Type	Coaxial, BNC
Accuracy	Locked to MCM oscillator
MCM Switching	Hitless switch

Phase Noise dBc/√Hz	10MHz	5MHz	1MHz
1Hz	-90dBc	-95dBc	-98dBc
10Hz	-120dBc	-130dBc	-120dBc
100Hz	-142dBc	-142dBc	-125dBc
1KHz	-155dBc	-155dBc	-125dBc
10kHz	-158dBc	-158dBc	-130dBc

Synthesizer Module

The Synthesizer Module provides 4 programmable output frequencies on the range 250Hz to 33MHz. The frequency scheme ensures that telecom frequencies on multiples of 8kHz are exact.

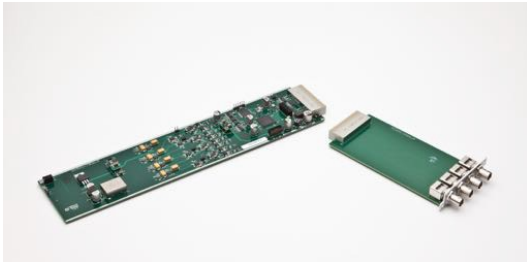


Specifications:

Waveforms		
Sinusoid	1ea.	10dBm nominal
Connector		BNC
Square	1ea.	0-5Vpk
Connector		BNC
Differential	2ea	per RS-422
Connector		3 Pin circular
Settable Resolution		1Hz
Frequency range		250 Hz to 33MHz
Accuracy		Locked to MCM oscillator
MCM Switching		Hitless switch

NTP Server

The NTP Server module enables the Modular Master Clock to act as an NTP server over an Ethernet network. Designed with security in mind, the NTP server module uses a custom network stack that enables it to ONLY act as an NTP server, and prevent it from being used as a gateway to compromise the entire system.

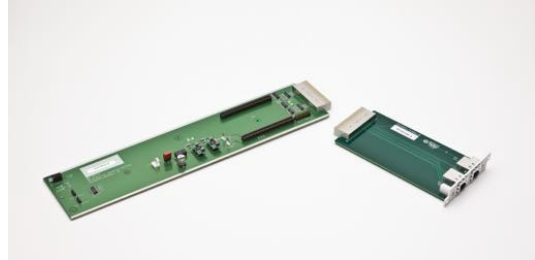


Specifications:

Signal Format	Ethernet 100BaseT
Protocols supported	NTPv3 RFC1305 NTPv4 RFC 5905
Authentication	MD5, SHA-1
Connector Type	RJ45
No of Outputs	2

Optical Crosslink Module

The Optical Crosslink Module is a unique feature of the MMC. When installed, it allows a second MMC to be synchronized as a slave chassis. If both chassis have a primary reference installed (e.g. GPS) then the two MCM's operate as peers. Peering provides additional redundancy, as well as providing additional references to detect failures.

When a duplex cable is provided, the optical link provides seamless and automatic propagation delay compensation. A security mode allows the optical link to be operated in a single direction from Master to Slave over a single fiber.

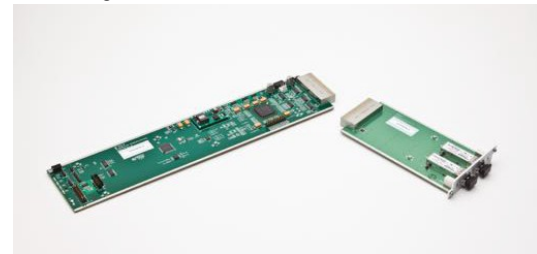

Specifications:

Connector Type	LC
No of Outputs	2 bi-directional per OSM
Synchronization Accuracy	
Phase Measure Accuracy	1ns
End to End Accuracy	<5ns synchronization
Optical	
Wavelength	Single Mode 1300nm
Safety	Class 1 CDRH/IEC 825
Range ³	2000m 9/125um cable

³ Consult Factory for longer range or multimode